

TONIK

◀ VINYL ROLLS ▶

ideco
blinds & floorings



DECORADOTM
Vinyl Rolls

Contents

Introduction	3
Key benefits	4
Tonik 240	5
Tonik 240 Datasheet	7
Tonik 260D	8
Tonik 260D Datasheet	9

You are free
Free to live the way you want at home.
Free to be inspired. To change your floor as easily as your decoration.
Free to choose a cleaner and more wholesome environment.
Free to watch your children grow and your home flourish.
To change your office to a baby room, then a teen room, a spare room...
And baby room all over again.
Free to make the best choices: rent, share, buy, rent out...
And always have the best floor options.
Free to walk around barefoot, to dance in the bathroom,
Or in the living room, with a drink in your hand, with your friends...
Free to change your flooring while still caring for the environment –
and your finances.
Free to choose a pattern that's perfectly you
And free to install it yourself, even if you're new to home renovation.
In short, you're free to live in a home that's both beautiful and alive,
A home that's yours and a home that's you.

TONIK
Vinyl Rolls

Your home, your way



Design



“This one matches my shoes”
TONIK Vinyl Rolls collection offers a broad selection of stunning designs and highly realistic rendering to enjoy choosing from.
Whatever the look you're going for, natural materials like wood or stone, patterns from geometric to classic tile designs, you'll find something in our range.



Well-being

“Inside my comfort zone”
Be comfortable in your own home, even on the floor! TONIK Vinyl Rolls offers that extra layer of comfort and well-being.
Warmer, quieter. Gentler on the environment, and the air you breathe. With our Vinyl Rolls, everything is done in order to ensure better indoor air quality, by reducing exposure to triggers of asthma and allergy.



Sustainability



“Always caring”
Just dropped his blanket for the 100th time today? Luckily TONIK Vinyl Rolls are baby-ready!
They are completely phthalate-free, easy to clean with no grout or gaps, they are the perfect vinyl for you, your baby and your home.



Easy to install


Even with no previous experience, laying our Vinyl Rolls is something you can do yourself. To make it even easier, we put together a clear, simple, step-by-step guide to take you through it.

To find out just how easy it is, take a look at our DIY guide online by scanning this QR Code.



Textile Backing

Textile backing gives vinyl flooring a smooth cushioned feel under-foot, and it dampens sounds too, making your home that little bit quieter. The extra textile layer offers another benefit: because of the extra absorption, it covers irregularities in the surface beneath it, so you won't need to prepare the subfloor before laying textile backed vinyl. Less hassle, more comfort, what's not to like?!



New Ultra Matt Effect

The elegant Ultra Matt effect finish reinforces the authentic beauty of a room's atmosphere to make design appear highly natural and realistic.

With soft, muted hues, it's also the perfect complement to bright furniture that brings life to a room whether a bathroom, a kitchen, or a living room.



Designing for life

You probably spend a lot of your time indoors, whether working or relaxing, caring or sharing. You probably also feel that safer, healthier indoor spaces designed using sustainable materials are important for your well-being.

We feel the same. That's why we apply Cradle to Cradle® principles, choosing EPEA* assessed materials, an international recognised research and sustainability consultancy institute, specialising in materials database.

We ensure complete transparency throughout the production chain, detailed in our Material Health Statement. This helps us benchmark progress as we improve the material composition of our products day after day.

As it is, we already use the quality materials for all our products. Our floors are 100% phthalate free and have low VOC emissions (<100µg/m³, ten times lower than required by European standards), which contributes to healthier, allergy/asthma-friendly indoor environments. Where possible, we also use materials that are both recycled, recyclable, with as low an environmental impact as possible.

We design our floors not just better for you, but gentler on our world too, helping preserve natural resources and mitigate climate change.



Driving collaboration

We all know that we can't do this alone. Protecting our environment, our climate, our natural resources, these challenges require collaboration. So that's where we start: building a consensus and driving collaboration with our partners and with independent organisations such as EPEA, to ensure that up and down the line our products and methods, and those of our partners respect international environmental standards and are geared towards positive environmental impact.

We promote transparency through Cradle to Cradle® material assessment process and encourage our stakeholders, partners and you, our customers, to join us, so that together we can build a more sustainable world.



TONIK 240

Made in Europe

AVAILABLE COLORS



Acares Herringbone GREGE
Roll Width: 4 & 2 meters



Fumed Oak GREY BEIGE
Roll Width: 4 meters



French Oak GREGE
Roll Width: 4 & 2 meters




Woolland Oak NATURAL
Roll Width: 4 meters



Idia BEIGE
Roll Width: 4 & 2 meters



Woolland Oak GREY
Roll Width: 4 & 2 meters

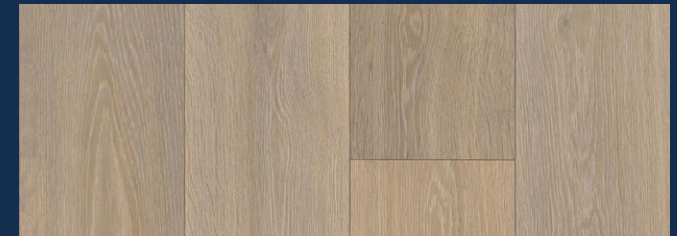

ANCARES OAK PLANK GREGE
Roll Width: 4 meters



Stylish Concrete GREY
Roll Width: 4 & 2 meters



Stylish Concrete DARK GREY
Roll Width: 4 & 2 meters



French Oak ANTHRACITE
Roll Width: 4 & 2 meters

TONIK 240

AVAILABLE COLORS



Cosmo Steel
Roll Width: 4 meters




French Oak Snow
Roll Width: 4 meters




Mill Oak Limited
Roll Width: 4 meters



Powell Oak Gravel
Roll Width: 4 meters



Powell Oak Hay
Roll Width: 4 meters




Zaragoza
Roll Width: 4 meters

Made in Europe

DATASHEET - TONIK 240

Classification	Norm	Value
Produit type	EN ISO 26986	Expanded (cushioned) poly (vinyl chloride) floor covering
Domestic classification	EN ISO 10874	23 Heavy
Commercial classification	EN ISO 10874	32 General
Industrial classification	EN ISO 10874	41 Moderate
Binder content	ISO 11638	Type I
Technical Characteristics	Norm	Value
Total thickness	ISO 24346	2,40 mm
Wear layer thickness	ISO 24340	0,35 mm
Total weight	ISO 23997	1580 g/m ²
Performance for CE Marking	Norm	Value
Declaration of Performance #	EN 14041	0007-0023-DOP-2020-01
Reaction to fire	EN 13501-1	Cfl-s1
Slip resistance	EN 13893	Class DS ($\mu \geq 0,30$)
Slip resistance	DIN 51130	R10
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	ISO 10456	0,030 m ² •K/W
Formaldehyde emission	EN 717-1	E1

Technical Performances	Norm	Value	
Dimensional stability average value	EN ISO 23999	$\leq 0,20$ %	
Castor chair	ISO 4918	No damage	
Impact sound reduction - ΔL_w	EN ISO 717-2	16 dB	
Colour fastness to light	ISO 105-B02	≥ 6	
Chemical resistance	ISO 26987	Not affected	
Underfloor heating		Suitable (maximum 27°C)	
Residual indentation	EN ISO 24343-1	Required value: $\leq 0,20$ mm	
Sustainability performances	Norm	Value	
Total VOC Emissions	EN 16516	Gold (≤ 100 $\mu\text{g} / \text{m}^3$)	
Material Health Statement		Available	
Emissions label		A+	
Recyclability through Restart®		Recyclable	
EPD		Available	
Phthalate - Free		Yes	
BREEAM rating		A+	
Dimensions and designs			
Roll	Roll 2 x 25 m	Roll 3 x 25 m	Roll 4 x 25 m




TONIK 260

AVAILABLE COLOR



Flanders BEIGE BROWN
Roll Width: 4 & 2 meters

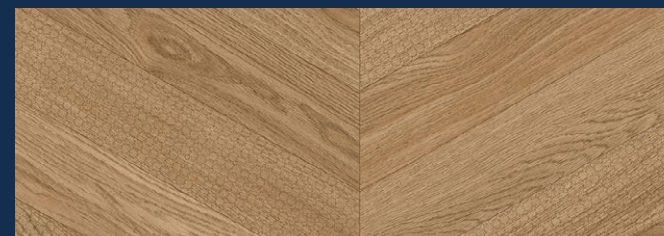

Chevron Tattoo Caramel
Roll Width: 4 meters

Made in Europe

DATASHEET - TONIK 260D

Classification	Norm	Value
Produit type	EN ISO 26986	Expanded (cushioned) poly (vinyl chloride) floor covering

Domestic classification	EN ISO 10874	22 General/Medium
-------------------------	--------------	-------------------

Technical Characteristics	Norm	Value
Total thickness	ISO 24346	2,60 mm

Wear layer thickness	ISO 24340	0,22 mm
----------------------	-----------	---------

Total weight	ISO 23997	1475 g/m ²
--------------	-----------	-----------------------

Performance for CE Marking	Norm	Value
----------------------------	------	-------

Declaration of Performance #	EN 14041	0132-0075-DOP-2020-01
------------------------------	----------	-----------------------

Reaction to fire	EN 13501-1	Bfl-s1
------------------	------------	--------

Slip resistance	EN 13893	Class DS ($\mu \geq 0,30$)
-----------------	----------	------------------------------

Slip resistance*	DIN 51130	R9 / R10
------------------	-----------	----------

Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
------------------------------	---------	---------------------------

Thermal resistance	ISO 10456	0,040 m ² •K/W
--------------------	-----------	---------------------------

Formaldehyde emission	EN 717-1	E1
-----------------------	----------	----

*Slip resistance DIN : R9/R10 depending on the embossing

Technical Performances	Norm	Value
Dimensional stability average value	EN ISO 23999	$\leq 0,20$ %

Impact sound reduction - ΔL_w	EN ISO 717-2	16 dB
---------------------------------------	--------------	-------

Colour fastness to light	ISO 105-B02	≥ 6
--------------------------	-------------	----------

Chemical resistance	ISO 26987	Not affected
---------------------	-----------	--------------

Underfloor heating		Suitable (maximum 27°C)
--------------------	--	-------------------------

Residual indentation	EN ISO 24343-1	Required value: $\leq 0,20$ mm
----------------------	----------------	--------------------------------

Sustainability performances	Norm	Value
-----------------------------	------	-------

Total VOC Emissions	EN 16516	Gold (≤ 100 $\mu\text{g} / \text{m}^3$)
---------------------	----------	--

Material Health Statement		Available
---------------------------	--	-----------

Emissions label		A+
-----------------	--	----

Recyclability through Restart®		Recyclable
--------------------------------	--	------------

Phthalate - Free		Yes
------------------	--	-----

BREEAM rating		A+
---------------	--	----

Dimensions and designs			
------------------------	--	--	--

Roll | Roll 2 x 30 m | Roll 3 x 30 m | Roll 4 x 30 m





CONTACT US

Fax: 212 7218

info@ideco.mu

www.ideco.mu

VISIT US



Old Pailles Road, Pailles



Lower Vale, The Vale