



ideco

blinds & floorings


Bamboo Decking

“The steel of the 21st century”

Bamboo’s exceptional technical features surpass those of most hardwoods, making it the ideal substitute for increasingly scarce tropical hardwoods.

Its distinct characteristics include high strength, straight grain, and unique aesthetic, offering a sophisticated and versatile solution for modern architectural and design applications.

Decorado Bamboo is crafted from 4–6 year-old moso bamboo harvested from sustainably managed forests. It is a superior choice for eco-conscious design.

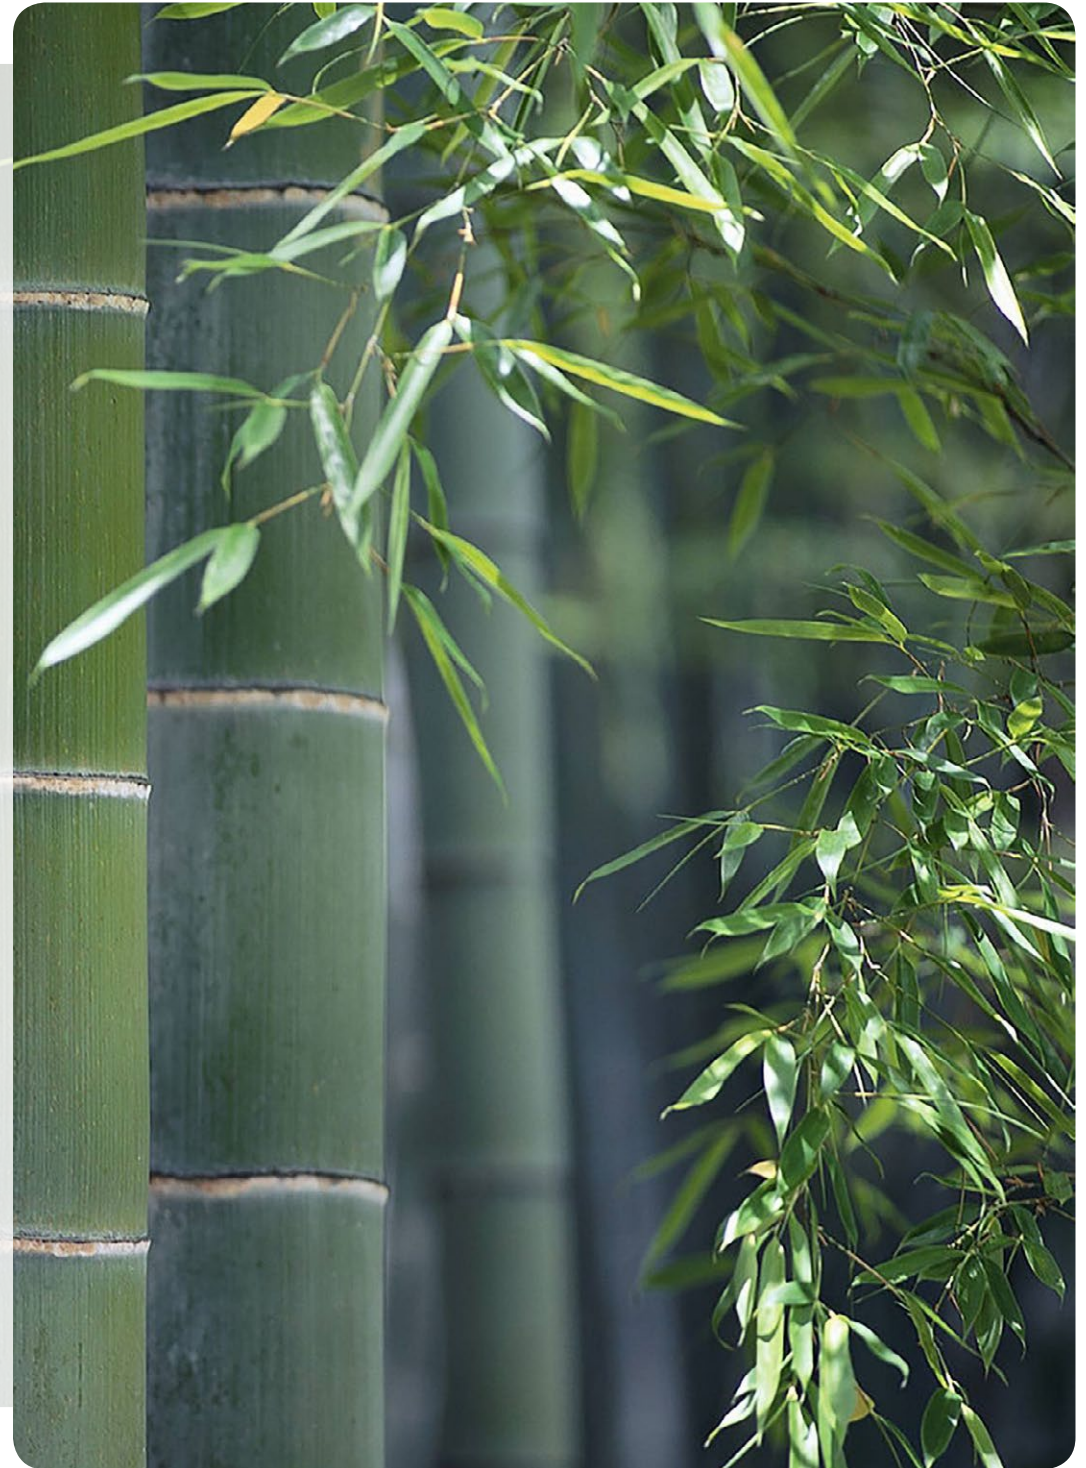



Durable, Sustainable, and Elegant



Sustainable & Eco-Friendly

Crafted from natural bamboo, Decorado products are a renewable, sustainable, and healthy choice for modern construction.



Dimensional Stability

Compressed under 2400 tons of pressure and thermally modified, our products deliver high density, exceptional hardness, termite resistance, and outstanding dimensional stability



Mold & Decay Resistance

Through thermal modification, natural nutrients within the bamboo are completely removed. This enhances material stability while providing superior mold and decay resistance.



Carbon Neutral

Bamboo is one of the most sustainable materials on Earth, absorbing significant amounts of CO2 during its growth. With low emissions during production, our bamboo products contribute to carbon neutrality.



Mold & Decay Resistance

Through thermal modification, natural nutrients within the bamboo are completely removed. This enhances material stability while providing superior mold and decay resistance.



Low Maintenance

Easy to install and clean, Decorado products require no painting, sealing, or additional staining, making them a hassle-free solution for outdoor and indoor use.



Performance Attribute


Stability	Excellent
Sustainability	Harvest cycle: 4-6 years
Maintenance Requirements	Low (annual oiling recommended)
Natural Appearance	Authentic wood-like aesthetics
Heat Retention	Low (comfortable in hot weather)

Product Category


Density	1.15-1.25 g/cm ³
Corrosion Resistance	Class I
Mold Resistance	Grade 0
Fire Resistance	Class Bf1-s1
Anti-Termite	Class 10
VOC Emission	Class E1
Modulus of Elasticity	≥ 10,000 MPa
Modulus of Rupture	≥ 80 MPa
Swelling Rate (1h Boiling Test)	≤ 3%
Swelling Rate (24h in Water)	≤ 1 %



Plank Size

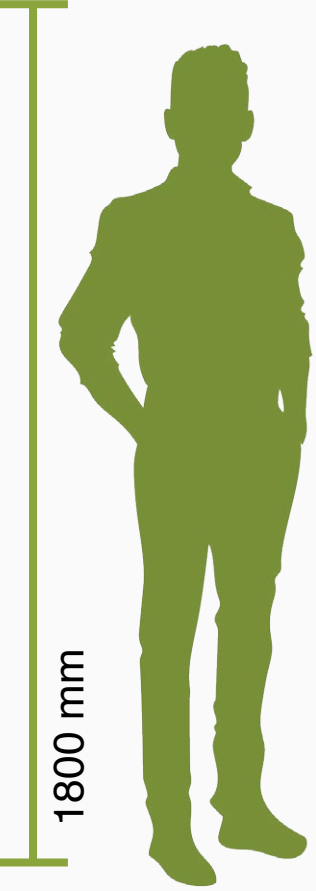


COFFEE : 1850 x 137 x 18 mm



DARK : 1850 x 137 x 18 mm

Board Width:

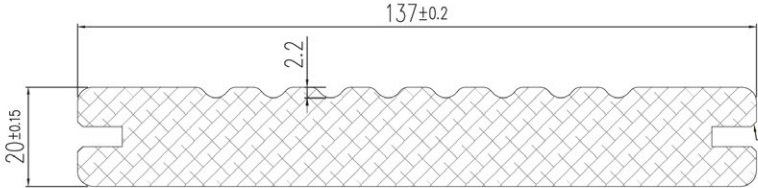

Board Length:



**2 COLORS
AVAILABLE**

COFFEE

DARK





CONTACT US

info@ideco.mu

Fax: 212 7218

www.ideco.mu

VISIT US



Old Pailles Road, Pailles



Lower Vale, The Vale